



Accommodates

- 2½" x 1½" Fire Hose Rack Assembly*

*Additional 5 or 10 lb. dry chemical fire extinguisher when required

Standard Construction & Features

- One piece 20 gauge cold-rolled steel door and frame, 18 gauge steel box
- Door is reinforced with rigid tubular metal
- Continuous steel piano hinge and pin
- White baked acrylic enamel finish*
- Door handle hardware

*Suitable as prime or finish coat

Optional Door & Frame Materials

- Add prefix **AL** to cabinet model no. for aluminum (clear anodized finish)
- Add prefix **SS** to cabinet model no. for 304 stainless steel (#4 brushed finish)
- Add suffix **-RED** to steel cabinet model no. for red baked acrylic enamel finish

Refer to page 5 for details

Ordering Procedure

- Select cabinet model number
- Select cabinet door style (refer to page 6)
- Select fire hose rack assembly (refer to pages 28 & 29)

Standard Construction

Model No.	Mounting Style	Trim A	Inside Box Dimensions			Frame O.D.*		Knockout Location					Wall Opening			
			B	C	D	E	F	G	H	J	K	Width	Height	Depth	ADA	
1110	Trimless	--	24"	34"	8"	--	--	4"	4"	4"	4"	25"	35"	8½"	✓	
1120	Recessed	¾"	24"	34"	8"	27½"	37½"	4"	4"	4"	4"	25"	35"	8¼"	✓	
1130	Semi-Rec.	1¼"	24"	34"	8"	27½"	37½"	4"	4"	4"	4"	25"	35"	7¼"	✓	
1140	Semi-Rec.	2½"	24"	34"	8"	27½"	37½"	4"	4"	4"	4"	25"	35"	6"	✓	
1150	Surface	9"	27¼"	37¼"	8¼"	27½"	37½"	--	--	--	--	--	--	--	No	

*Deduct ¾" O.D. for aluminum door and frame





Fire-Rated

Model No.	Mounting Style	Trim A	Inside Box Dimensions			Frame O.D.*		Knockout Location					Wall Opening			
			B	C	D	E	F	G	H	J	K	Width	Height	Depth		
FR1120	Recessed	¾"	24"	34"	8"	27½"	37½"	--	--	--	--	26⅞"	36⅞"	9⅞"		
FR1130	Semi-Rec.	1¼"	24"	34"	8"	27½"	37½"	--	--	--	--	26⅞"	36⅞"	8⅞"		
FR1140	Semi-Rec.	2½"	27"	34"	8"	27½"	37½"	--	--	--	--	26⅞"	36⅞"	7"		

Note: Fire-Rated cabinets are fabricated in accordance with **WARNOCK HERSEY** certified designs and labelled for 1 and 2-hour combustible and non-combustible walls. Boxes are double-wall construction, lined with fire resistant material.



1100 Series

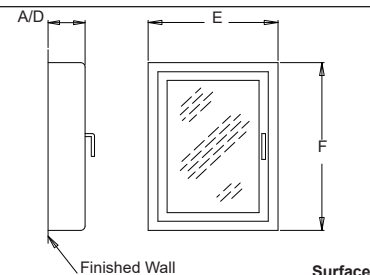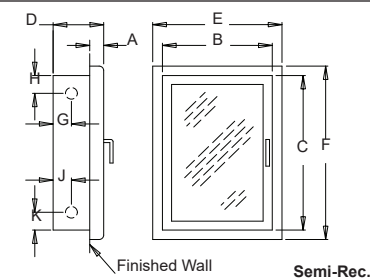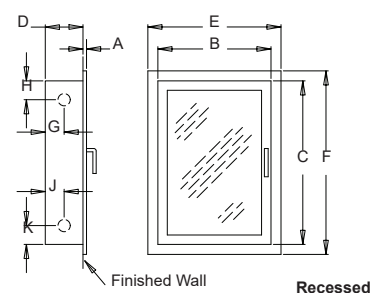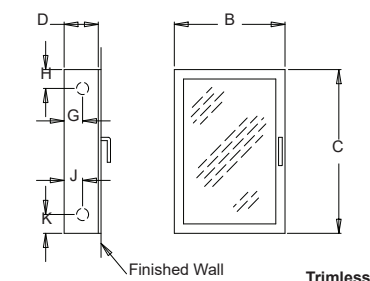

Trimless, recessed & semi-rec. cabinets furnished with combination knockouts (1½" & 2½") on both sides of box.